


ALPHA PS1

Owner's Guide

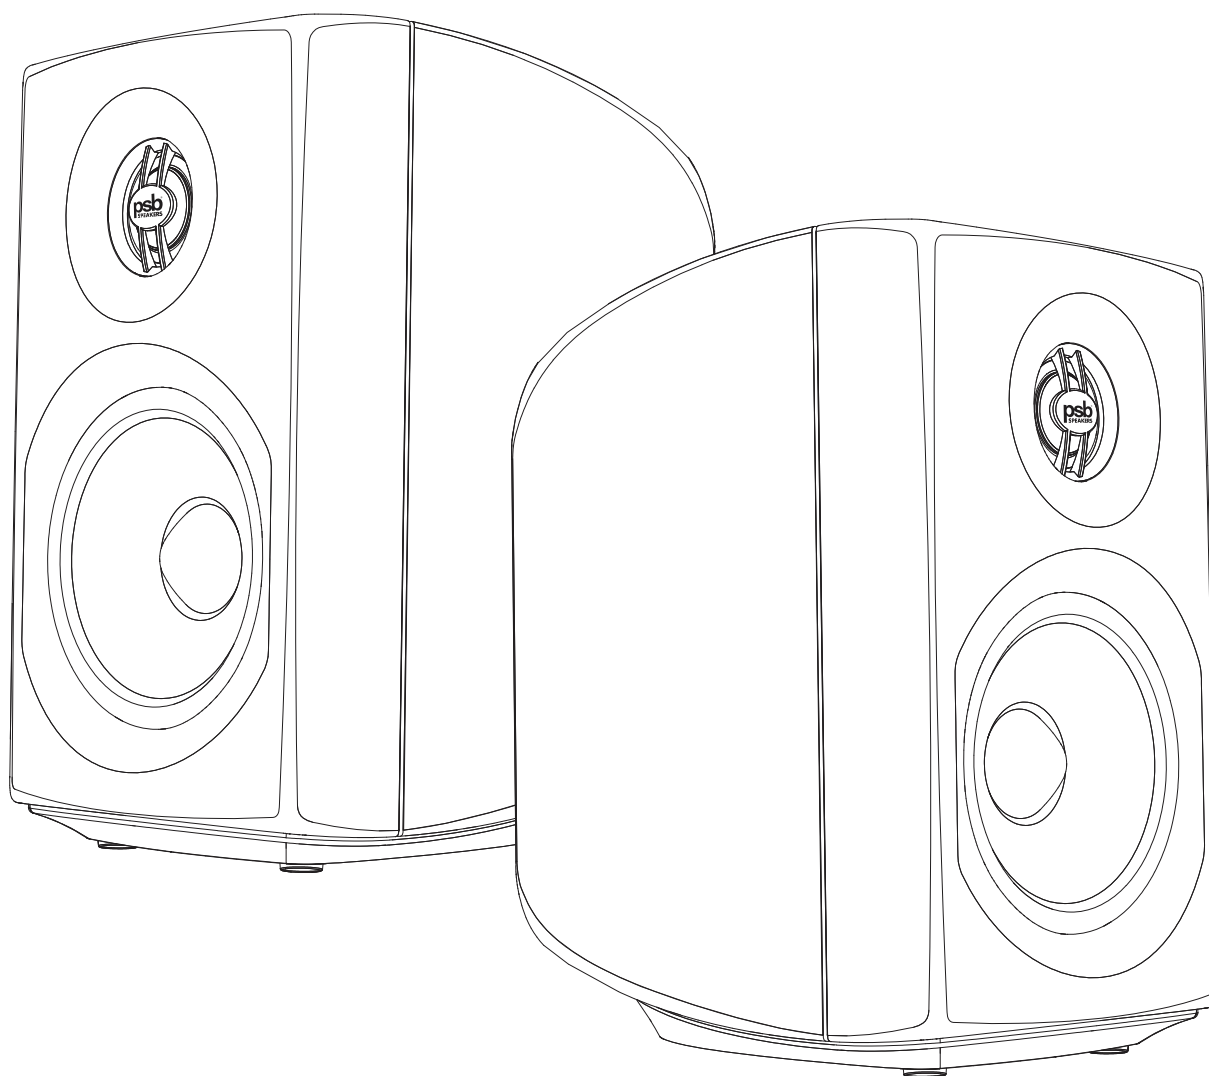

Safety Information

Information with regard to safety is required according to this standard. This information shall be given in a separate booklet or sheet, or be located before any operating instructions in an instruction for installation or use and supplied with the apparatus. This information shall be given in a language acceptable to the country where the apparatus is intended to be used.

The important safety instruction shall be entitled "Import Safety Instruction". The following safety instruction shall be included where applicable, and when used, shall be verbatim as follows. Additional safety information is not prohibited from being included by adding statements after the end of the following safety instruction list. At the manufacturer's option, a picture or drawing that illustrates the intent of a specific safety instruction is not prohibited from being placed immediately adjacent to that safety instruction.

- 1) Read these instructions.
- 2) Keep these instructions.
- 3) Heed all warnings.
- 4) Follow all instructions.
- 5) Do not use this apparatus near water.
- 6) Clean only with dry cloth.
- 7) Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
- 8) Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- 9) Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete unit.
- 10) Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
- 11) Only use attachments/accessories specified by the manufacturer.
- 12) Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
- 13) Unplug this apparatus during lightning storms or when unused for long periods of time.
- 14) Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

- 15) The apparatus shall not be exposed to dripping or splashing and that no objects filled with liquids, such as vases, shall be placed on the apparatus.
- 16) To reduce the risk of fire or electric shock, this apparatus should not be exposed to rain or moisture.
- 17) The mains plug or an appliance coupler is used as the disconnect device, the disconnect device shall remain readily operable.



The lightning flash with arrowhead symbol within an equilateral triangle, is intended to alert you to the presence of uninsulated “dangerous voltage” within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point with an equilateral triangle is intended to alert you to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the product.

Notice of FCC Compliance

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



Thank you for purchasing PSB Speakers Alpha PS1 Powered Speaker, a highly developed bookshelf speaker recommended for nearfield listening that brings music and video collections to life. Producing natural musical dynamics and precisely imaged sound, the Alpha PS1 Powered Speaker will bring you closer to the music you love.

Alpha stands for the best value in high performance loudspeakers. The Alpha PS1 Powered Speaker takes the Alpha concept to an entirely new level by including a built-in amplifier to create a complete desktop solution with enough acoustic output to fill small to medium sized rooms. Based on decades of acoustic research and rigorous testing, the Alpha PS1 Powered Speaker benefits from proven knowledge and techniques, and delivers “true-to-nature” sound quality for today's music enthusiasts and professionals.

By supplying this owner's guide, we hope you will read through this information to help assure that you are getting the most out of your PSB product, and your music.

UNPACKING...

The packing materials are designed to protect the speakers from damage during transport, however if visible or concealed damage is to occur in handling, it should be reported at once to your authorized PSB dealer, or to the shipping company that delivered your loudspeakers. We highly recommend retaining all packaging, as it may be needed to transport the speakers in the future.


CONNECTING...

The built-in amplifier in PSB Powered Speakers is located in the left speaker. All speaker, audio source and power supply connections must be connected to the speaker amplifier to ensure proper performance.

Before making a connection, ensure that your audio source and speakers are powered off as severe damage to equipment and/or your ears could result.


The Speakers

- I. Connect the right speaker to the indicated and corresponding output jack on the speaker amplifier using the included PowerLink speaker cable.
- II. As these speakers are self-powered, do not attempt to connect the supplied cable to the speaker outputs of a stereo receiver.
- III. For improved low frequency response, the Alpha PS1 Powered Speaker is equipped with a sub out connection for adding a powered subwoofer, if needed.
 - a) *To connect a powered subwoofer, use a standard RCA cable and connect it from the "SUB OUT" to the low-level input on the subwoofer.*
- IV. The Alpha PS1 Powered Speaker includes a 5V, 500mA USB connection. The USB port is for power and charging, not for data transfer or music playback/streaming.

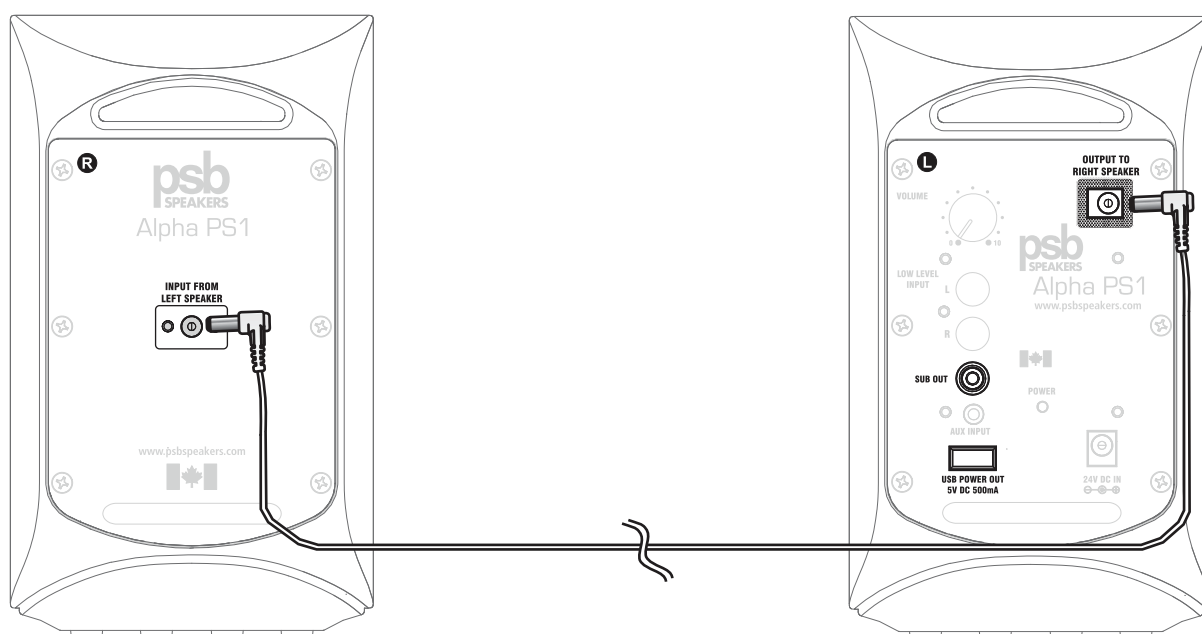


The Audio Source

- I. Using the supplied 1/8" (3.5mm) connection cable, connect one end to the speaker AUX input, and the opposite end to the selected audio source.
- II. To connect a media device such as a CD Player, use standard stereo RCA cables and connect it to the corresponding RCA inputs.

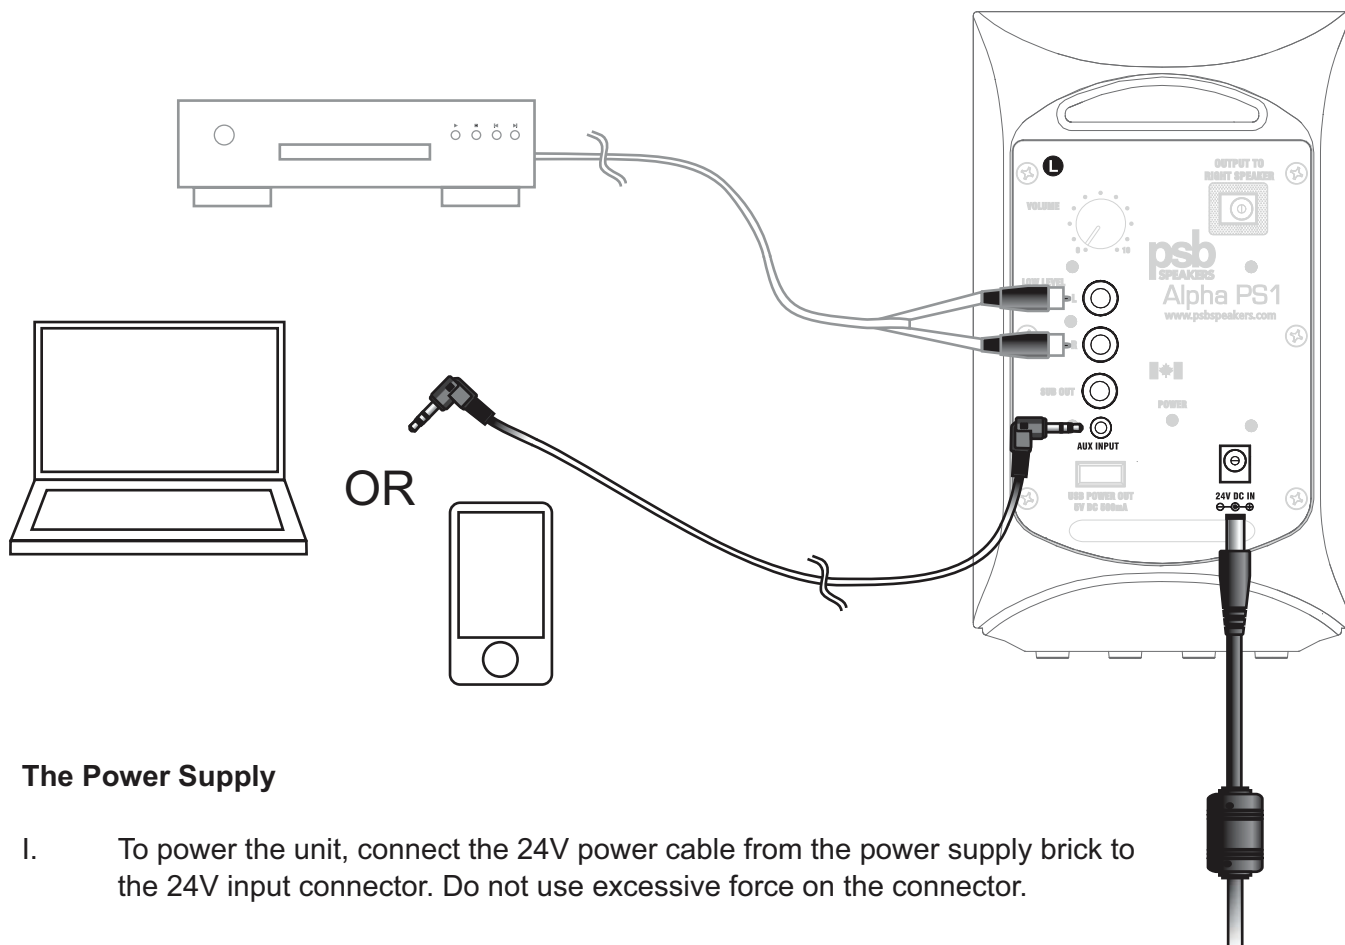

The Power Supply

- I. To power the unit, connect the 24V power cable from the power supply brick to the 24V input connector. Do not use excessive force on the connector.
- II. Using only 230V or 120V power cables provided with the speakers, connect the corresponding power cable to the other end of the power supply brick that is appropriate for your country's power outlet.
- III. Connect the power cable to a power outlet.

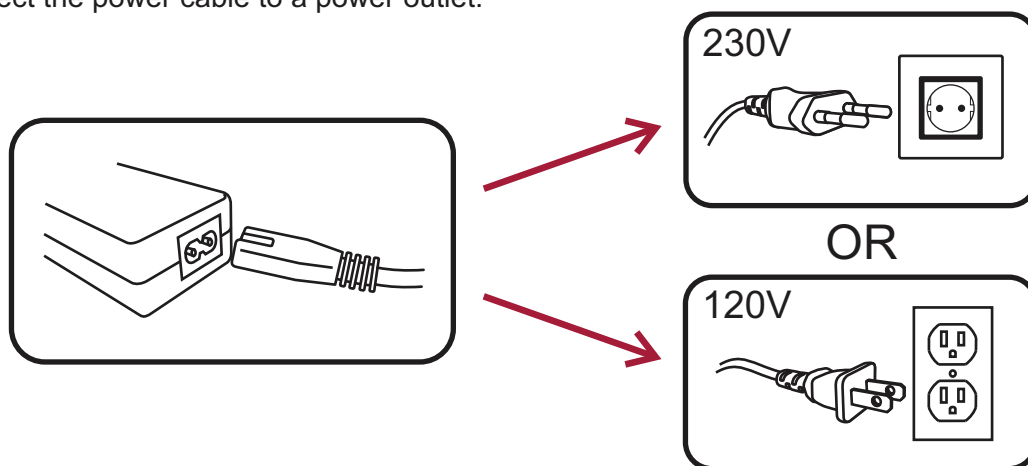

LISTENING...

- I. To turn the speakers on, locate the rear toggle switch and switch it to the “ON” position.
- II. To verify power, check that the LED indicator is illuminated green.
- III. Turn on your audio source, adjust it to a desired listening level and enjoy all of your favourite audio selections.
- IV. To adjust the volume level of the speakers, locate the rear volume control and set it to a desired listening level. Be careful of excessive volume levels as it could result in severe and/or permanent damage.

POSITIONING...

- I. As symmetrically as possible, place your Alpha PS1 Powered Speakers at a comfortable listening location with no obstructions at the front or back.
- II. We recommend at least three inches of clearance around the back of both speakers. Good air circulation is required for heat dissipation, and to ensure proper performance of the rear-firing ports. Similar positioning and clearance should be used for both speakers.
- III. For nearfield listening and other listening scenarios, your preference may be to use the available Alpha Tilt Base (PTB-1) to help tilt each speaker onto the listening axis. See Available Accessories.

For more detailed information about speaker placement, please visit www.psbSpeakers.com

PROTECTING YOUR INVESTMENT

For long lasting enjoyment of your PSB speakers, you should respect their limits and avoid excessive volume levels for music or movie playback. Excessive volume levels can damage all types of speakers. If your speakers are pushed to excessive volume levels, they could be driven into “clipping”, which may result in severe and/or permanent damage. If listening to your speakers at loud levels, listen carefully for any signs of harsh, distorted midrange and diminishing precision – if detected, turn the volume down immediately.

NEVER TEST PEAK LISTENING LEVELS OF YOUR SPEAKERS BY TURNING THE VOLUME UP ALL THE WAY!

CARING AND CLEANING...

For safe, sanitary use, it is essential to maintain and clean your speakers periodically. However, excessive cleaning may cause damage and jeopardize the longevity of the product. When not in use, avoid storing in extreme hot or cold temperatures and humidity, and avoid exposure to liquids.

I. Travel Care

The carton for this product is also designed as a travelling case to be used for safely transporting your speakers to wherever you want high performance sound. To transport, carefully place each speaker into its protective cloth bag, set both of them gently into the carton and close each panel. A carrying handle has also been provided for convenience and effortless transport.

II. Cabinet Care


PSB cabinets have varying materials and finishes, including wood veneers, vinyl, anodized aluminium and high gloss, and should be treated with the same care you would with similar finishes such as on furniture. Dust lightly with a soft cloth, avoiding abrasive materials that will cause permanent damage to the cabinet. If necessary, wipe carefully with a cloth slightly dampened with water-based cleaner to remove heavy soil.

II. Drivers and Port Care

During light cleaning, avoid touching speaker diaphragms as it could cause permanent damage to the tweeter and/or drivers. If deeper cleaning is required, we suggest using a lint brush to clean the driver ports.

AVAILABLE ACCESSORIES...

Some users may prefer tilting the speakers. To achieve such positioning, an optional Alpha Tilt Base kit (PTB-1) is available from your local PSB authorized dealer/distributor.

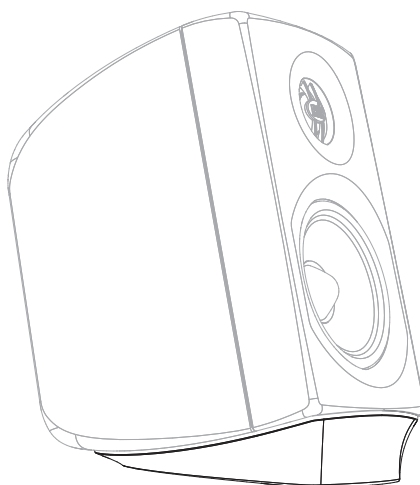

Tilt Base

TROUBLESHOOTING...

Issue: Audible Distortion

- I. If a speaker begins to sound distorted or fatigued, check to see whether playing at a lower volume resolves this issue.

Issue: Low or No Volume Output

- I. If there is low or no volume output, check that the audio source is powered "ON", and the audio is set to a medium volume level and not muted.
- II. If audio source is indeed powered "ON", check and ensure that the cable connection to the audio source is properly secured, or try a different cable.

Issue: No Sound from Right Speaker

- I. If there is volume output from only the left channel, check that the cable connection is properly secured, and connected to the corresponding output jacks on both speakers.

If you require service, please visit your local authorized PSB service centre, or our PSB Speakers website and open a support ticket in the PSB Lounge (<http://www.psbspeakers.com/lounge>).

If you have moved since your purchase, the nearest authorized PSB dealer will be able to assist you. If the problem is not resolved, please contact us directly and provide the model name, serial number, date of purchase, dealer name, and a full detailed description of the issue.

Environmental Protection

At the end of its useful life, this product must not be disposed of with regular household waste but must be returned to a collection point for the recycling of electrical and electronic equipment. The symbol on the product, owner's manual and packaging, point this out.



The materials can be reused in accordance with their markings. Through re-use, recycling of raw materials, or other forms of recycling of old products, you are making an important contribution to the protection of our environment.

Your local administrative office can advise you of the responsible waste disposal point.

We appreciate your purchase of our product, and thank you for taking the time to read this owner's guide. We hope you enjoy the exceptional satisfaction that PSB Speakers have to offer, and wish you many years of enjoyable listening.

Real Sound for Real People.

ALPHA PS1

POWERED SPEAKERS FOR ALL YOUR MEDIA



SPECIFICATIONS

FREQUENCY RESPONSE

On Axis @ 0° ± 3dB	80-22,000Hz
On Axis @ 0° ± 1 1/2dB	90-20,000Hz
Off Axis @ 30° ± 3dB	90-12,000Hz
LF Cutoff -10dB	58Hz

AMPLIFIER POWER

Continuous	2 x 20W
Dynamic Peak	2 x 40W
Type	Class D

ACOUSTIC DESIGN

Tweeter (Nominal)	3/4" (19mm) Aluminium Dome
Woofer (Nominal)	3 1/2" (90mm) Polypropylene Cone Rubber Surround
Crossover	2100Hz LR4
Internal Volume	.067 ft ³ (1.9 litre)
Design Type	Bass Reflex Rear Slot Port

SIZE (W x H x D)

Gross Dimensions including Feet and Terminals	4 1/2 x 7 7/8 x 6 7/8" * (114 x 197 x 174mm)
---	---

WEIGHT

Net	8.3lb (3.8kg)/pr
Shipping	12lb (5.5kg)/pr

FINISH

Gloss Black

FEATURES

Volume Control
Mono Subwoofer Output
Low Level RCA Input
Low Level 1/8" (3mm) "AUX" Input

ACCESSORIES

Power Supply Brick
Power Link
White Drawstring Bag

*Non-metric measurements are approximate.

All specifications are subject to change without notice. PSB, PSB Speakers, and Alpha are trademarks of, or used under license by, PSB Speakers, a division of Lenbrook Industries Limited.
© 2013 PSB Speakers 12-026. All rights reserved. Printed in October 2013.

REAL SOUND for REAL PEOPLE



SubSeries Specifications



Available in Dark Cherry Wood Veneer,
Black Ash Wood Veneer, Satin Black

SubSeries




	SubSeries 500 Subwoofer	SubSeries 300 Subwoofer	SubSeries 200 Subwoofer	SubSeries 125 Subwoofer	SubSeries 100 Compact Subwoofer
Frequency Response (Anechoic Chamber)					
On Axis @ 0°±3dB LF Cutoff -10dB	25-150Hz 22Hz	27-150Hz 24Hz	28-150Hz 25Hz	35-150Hz 31Hz	39-150Hz 35Hz
Amplifier Power (Internal Amplifier)					
Continuous Dynamic Dynamic Peak	500 Watts 750 Watts 1500 Watts	300 Watts 425 Watts 850 Watts	200 Watts 280 Watts 560 Watts	125 Watts 160 Watts 320 Watts	50 Watts 50 Watts 100 Watts
Acoustic Design					
Woofer (Nominal)	12" (300mm) Woven Fibreglass Cone Rubber Surround 2" (50mm) Voice Coil 80oz (2268g) Magnet Cast Basket	12" (300mm) Polypropylene Cone Rubber Surround 2" (50mm) Voice Coil 50oz (1400g) Magnet	10" (250mm) Polypropylene Cone Rubber Surround 1 1/2" (38mm) Voice Coil 35oz (990g) Magnet	8" (203mm) Polypropylene Cone Rubber Surround 1 1/2" (38mm) Voice Coil 28oz (794g) Magnet +20oz (567g) SH Magnet	5 1/4" (135mm) Polypropylene Cone Rubber Surround 1" (25mm) Voice Coil 20oz (567g) Magnet
Crossover	Variable 50-150Hz, LR4 Low Pass Filter	Variable 50-150Hz, LR4 Low Pass Filter	Variable 50-150Hz, LR4 Low Pass Filter	Variable 50-150Hz, LR2 Low Pass Filter	Variable 50-150Hz
Design Type	Bass Reflex 2 x 2 3/4" (70mm) Down Firing Ports	Bass Reflex 3" (75mm) Down Firing Port	Bass Reflex 2 5/8" (67mm) Down Firing Port	Bass Reflex 1" x 8" (25mm x 203mm) Front Port, Video Shielded	Sealed
Size (W x H x D) (Gross Dimensions)					
	15 3/8 x 23 1/4 x 20 1/2" ** (392 x 589 x 522mm)	15 3/8 x 20 1/8 x 17 3/8" ** (390 x 510 x 441mm)	13 3/8 x 17 1/2 x 15 1/2" ** (338 x 443 x 391mm)	9 5/8 x 14 1/8 x 15 5/8" ** (244 x 359 x 396mm)	6 3/8 x 6 3/8 x 7 7/8" ** (162 x 162 x 199mm)
Weight					
Net Shipping	71.6lb (32.5kg)/each 82.6lb (37.5kg)/each	43lb (19.5kg)/each 50lb (22.7kg)/each	34lb (15.5kg)/each 39lb (18kg)/each	24lb (11kg)/each 29lb (13kg)/each	6.05lb (2.75kg)/each 7.6lb (3.46kg)/each
Finish					
	Black Ash or Cherry Wood Veneer	Black Ash	Black Ash or Dark Cherry	Black Ash or Dark Cherry	High Gloss Black
Features					
	Front Mounted Volume and Crossover Continuous Variable Phase Control Auto On/Off LFE Input	Front Mounted Volume and Crossover Phase Switch Auto On/Off LFE Input <0.5W Standby Power	Front Mounted Volume and Crossover Phase Switch Auto On/Off LFE Input <0.5W Standby Power	Front Mounted Volume and Crossover Phase Switch Auto On/Off LFE Input	Rear Mounted Volume and Crossover Phase Switch Auto On/Off (Standby) 2 x RCA L(LFE)/R Inputs NA/EU Cords Supplied 100V-240V, 50/60Hz USB Power Socket Only, 5V/500mA <0.5W Standby Power

** Non-metric measurements are approximate.

All specifications are subject to change without notice. Non-metric measurements are approximate. PSB Speakers will not assume any liability for errors in this brochure which may result in errors being made by retailers, custom installers, cabinet makers or other end users based on information contained in this document. PSB Speakers reserves the right to change specifications or features without notice. © 2014 PSB Speakers, a division of Lenbrook Industries Limited. PSB is a registered trademark of Lenbrook Industries Limited. All rights reserved. No part of this publication may be reproduced, stored or transmitted in any form whatsoever without the written permission of PSB Speakers. 14-003 Printed April 2014.

www.psbSpeakers.com

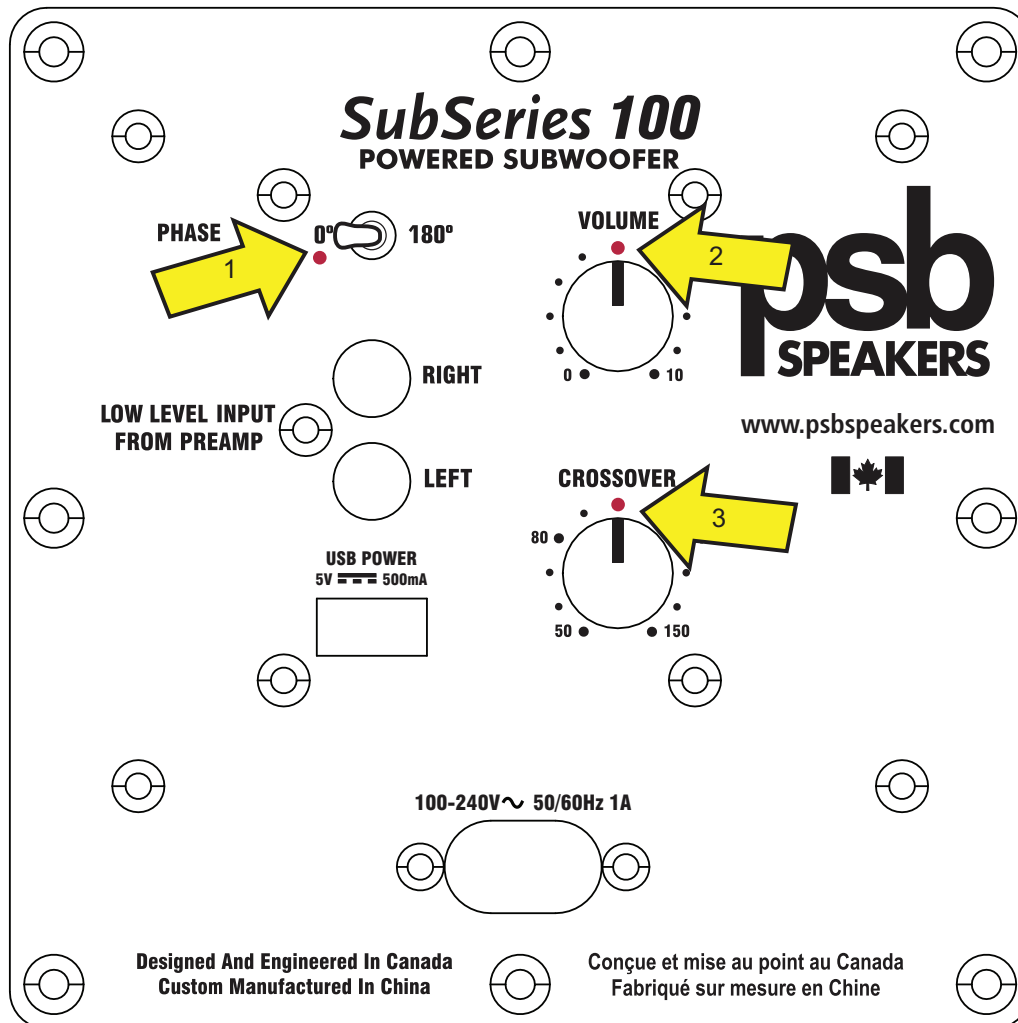

Recommended Settings for the SubSeries 100 when matched with the Alpha PS1 powered speakers

Paramètres recommandés pour le SubSeries 100 lorsqu'apparié aux haut-parleurs amplifiés Alpha Ps1

Configuración recomendada para el altavoz SubSeries 100 en combinación con los altavoces activos Alpha Ps1.

Empfohlene Einstellungen für SubSeries 100, wenn mit den Alpha PS1-Aktivlautsprechern abgestimmt

Impostazioni consigliate per le SubSeries 100 quando sono abbinate agli altoparlanti alimentati Alpha PS1

SubSeries 100

Compact Powered Subwoofer

Mighty Small, Mighty Powerful!



Don't be fooled by its cute looks and tiny proportions—the SubSeries 100 Compact Powered Subwoofer may be small, but it's got plenty of might. Ideally suited for bringing full range sound to smaller rooms and to complement smaller speakers, this powered wonder is a plug 'n play solution that completes any home theatre, desktop audio, or game station audio system. Unlike typical desktop products, the SubSeries 100 is thoroughly engineered by PSB Speakers, one of the most highly reviewed brands of high-end speakers in the world and winner of countless awards in its 40-year history. The SubSeries 100 is solid, powerful and articulate.

Muscle Power

This little box packs a lot of muscle. A specially designed 5 1/4" woofer is computer optimized to get the best bass extension and dynamic range without distortion. An innovative filter pole shifting technique is used to squeeze the maximum deep bass from the specially engineered drive unit. The enclosure is extremely rugged and resonance-free assuring that only the desired bass frequencies are radiated into the room for clean articulate bass response. The efficient and cool running 50W (continuous) Class D amplifier is capable of 100W dynamic peak power and carefully matched to the driver. By matching the amplifier to the driver characteristics a synergy is achieved that boosts the level of performance far beyond what could be achieved otherwise.

Fully Loaded

The SubSeries 100 is a fully featured product, giving nothing away to its acclaimed big brothers in the PSB subwoofer family. Along with adjustable volume, there are controls for setting the crossover frequency and inverting the phase to facilitate a perfect and seamless integration with the full range or satellite speakers with which the SubSeries 100 is partnered. There are even special markings that indicate the optimal settings when used with the PSB Alpha PS1 Powered Speaker, a combination that creates an incredible micro-sized full range system.



Features

- 100 Watts Dynamic Peak Power
- 135mm Long Throw Woofer
- Variable Crossover Frequency 50Hz – 150Hz
- Phase Switch 0° - 180°
- 2 x RCA L (LFE) / R inputs
- <0.5 Watts Standby Power Consumption
- Auto On/ Off (Standby)

Flexing Our Muscles

The SubSeries 100 is at home in a variety of audio applications thanks to its full features. Whether used with our small powered Alpha PS1 speakers or partnered with our PSB Imagine W3 On-Wall sound bar in a home theatre system, the SubSeries 100 adds powerful and articulate bass, creating a solid foundation for movies or musical enjoyment. Need more bass power, but still don't have space for a big subwoofer? Add a second SubSeries 100 to double the power. Using two smaller subwoofers is often better than one large subwoofer, since this configuration offers smoother, more even response in most rooms. Line level inputs accept both stereo preamp outputs and the mono LFE channel output from an AV Receiver.

The PSB SubSeries 100 Compact Power Subwoofer brings so much in so little a subwoofer. It's an all-new "smaller" dimension to high performance audio!



SubSeries 100 Compact Powered Subwoofer

FREQUENCY RESPONSE		(Anechoic Chamber)
On Axis @ 0° ±3dB		39Hz - 150Hz
LF Cutoff -10dB		35Hz
AMPLIFIER POWER		(Internal Amplifier)
Continuous		50W
Dynamic		50W
Dynamic Peak		100W
Type		Class D
ACOUSTIC DESIGN		
Woofer (Nominal)		5 1/4" (135mm)
35Hz		Polypropylene Cone
		Elliptical Surround
Crossover		Variable 50Hz - 150Hz
Internal Volume		0.08 ft³ (2.2 litres)
Design Type		Sealed
SIZE (W x H x D)		
Gross Dimensions including knobs and speaker terminals		6 3/8 x 6 3/8 x 7 7/8" (162 x 162 x 199mm)
WEIGHT		
Net		6.05lb (2.75kg)/each
Shipping		7.6lb (3.46kg)/each
FINISH		
		High Gloss Black
		4 Silicone Rubber Feet
FEATURES		
		Amplifier Panel Volume Control
		Variable Frequency
		Phase Switch 0°-180°
		2 x RCA L(LFE) / R inputs
		Auto On/Off (Standby)
		<0.5W Standby Power Consumption
		USB Power Only Socket 5V/500mA
		NA and EU cords supplied
		100V - 240V, 50/60 Hz

All specifications are subject to change without notice. PSB, PSB Speakers, and Imagine are trademarks of, or used under license by, a division of Lenbrook Industries Limited.

© November 2013 PSB Speakers. 13-035 All rights reserved.

REAL SOUND for REAL PEOPLE

www.PSBspeakers.com